

4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter

KP-5HA-45-RACL



Features

- This horn antenna is packaged with KP-5PDA-R5ACL radio adapter
- High-performance gain and patterns that are stable over a wide bandwidth
- Interference mitigation with highly suppressed side-lobes and superior front-to-back that allows channel reuse
- Over 25 dB cross polarization discrimination and port isolation for optimal MIMO performance
- Ideal for high-density AP deployments with radio co-location due to compact size and highly focused radiation
- Improved coverage near and far from the tower with equal elevation and azimuth beamwidths
- Adjustable horizontal / vertical or $\pm 45^\circ$ slant polarization that is compatible with all 5 GHz CPE radios
- Quick-connect waveguide allows polarization to be adjusted and quick change of adapters without tools
- Direct Connect radio-specific and dual polarized N-type connector adapters available
- Fine azimuth- and elevation- tilt markings to simplify alignment
- Mountable on left or right side of the pole without flipping upside down

Applications

- Wireless MIMO LAN systems & IEEE 802.11n applications
- Point-to-multipoint (PtMP) requiring sectorial coverage
- Supports public safety (4.9 GHz), U-NII-1, 2, 3, and 4 (5.15-5.925 GHz), and up to 6.4GHz for world-wide market
- Mobile WiMAX Wireless Internet Provider "cell" sites
- Gap coverage close to the tower
- High-density deployments requiring frequency reuse to achieve high capacity and data rates
- Valleys, mountains, mines, or regions with large elevation changes that need uniform coverage

Description

The KP-5HA-45-RACL is a high performance symmetrical horn antenna with a 6 dB beamwidth of 45° and a stable gain of 16 dBi and over an ultra-wide bandwidth of 4.9 GHz to 6.4 GHz. This horn antenna is packaged with KP-5PDA-R5ACL radio adapter which is designed specifically for the Ubiquiti Rocket 5AC-Lite radio.

The horn antenna's symmetrical radiation patterns was optimized using advanced genetic algorithm techniques to have significantly reduced side lobes that rapidly drops below 30 dB outside the main beam and a minimum front-to-back of 38 dB. The highly suppressed side lobes and superior front to back allows for channel (frequency) reuse and can reach high levels of spectral efficiency in the most challenging and noisy environments. The polarization is adjustable between horizontal/vertical and $\pm 45^\circ$ slant, making the horn compatible with any 4.9 GHz to 6.4 GHz single or dual polarization 2 x 2 MIMO radio and eliminates the risk of link strength degradation due to polarization mismatch.

The KP-5PDA-R5ACL is a push-in adapter that features simplified installation with patented, quick-connect waveguide technology to the antenna and a durable housing to snap in the radio without any additional cables or taping. The weatherproof adapter is built to withstand challenging environments subject to intense UV, rain, snow, and ice and is highly reliable over a longer product lifetime.

Configuration

Application Band	5 GHz
Band Type	Single
Radiation Pattern	Directional
Polarization	H/V or 45 Deg. Slant
Number of Ports	2
Lightning Protection	RF connector grounded to mounting bracket
Housing Material and Plating	Anodized Aluminum, Powder Coat

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter KP-5HA-45-RACL](#)

4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter

KP-5HA-45-RACL



Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	4.9		6.4	GHz
Input VSWR		1.5:1		
Impedance		50		Ohms
Horizontal 6dB Beam Width		45		Degrees
Vertical 6dB Beam Width		45		Degrees
Input Power			100	Watts

Specifications by Band

Description	Band 1	Band 2	Band 3	Band 4	Band 5	Units
Range	4,900-5,400	5,400-5,900	5,900-6,400			MHz
Gain	15.3	16	16.1			dBi
Horizontal HPBW	31	31	30			Degrees
Horizontal 6dB Beam Width	45	45	43			Degrees
Vertical HPBW	31	31	30			Degrees
Vertical 6dB Beam Width	45	45	43			Degrees
Cross Polar Ratio HPBW	25	25	22			dB
Port Isolation	30	30	26			dB
Front to Back Ratio	36	38	38			dB
VSWR Max	2:1	1.7:1	1.7:1			

Mechanical Specifications

Radome Material
Housing Material
Housing Plating/Color

UV Resistant PVC
Anodized Aluminum
Powder Coat

Size

Length
Width
Height
Mounting Mast Diameter
Weight

11 in [279.4 mm]
10.8 in [274.32 mm]
13 in [330.2 mm]
0.75 to 3.6 in [19.05 to 91.44 mm]
6.5 lbs [2.95 kg]

Environmental Specifications

Temperature

Operating Range -40 to +60 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:

[4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter KP-5HA-45-RACL](#)

4.9 GHz to 6.4GHz, 45 Degree Horn,
Ubiquiti Rocket 5AC Lite Adapter

KP-5HA-45-RACL



Wind Survivability
Wind Loading

125 MPH [201.17 KPH]
Frontal, 24 lbf

Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter KP-5HA-45-RACL](#)

4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter

KP-5HA-45-RACL



Typical Radiation Pattern

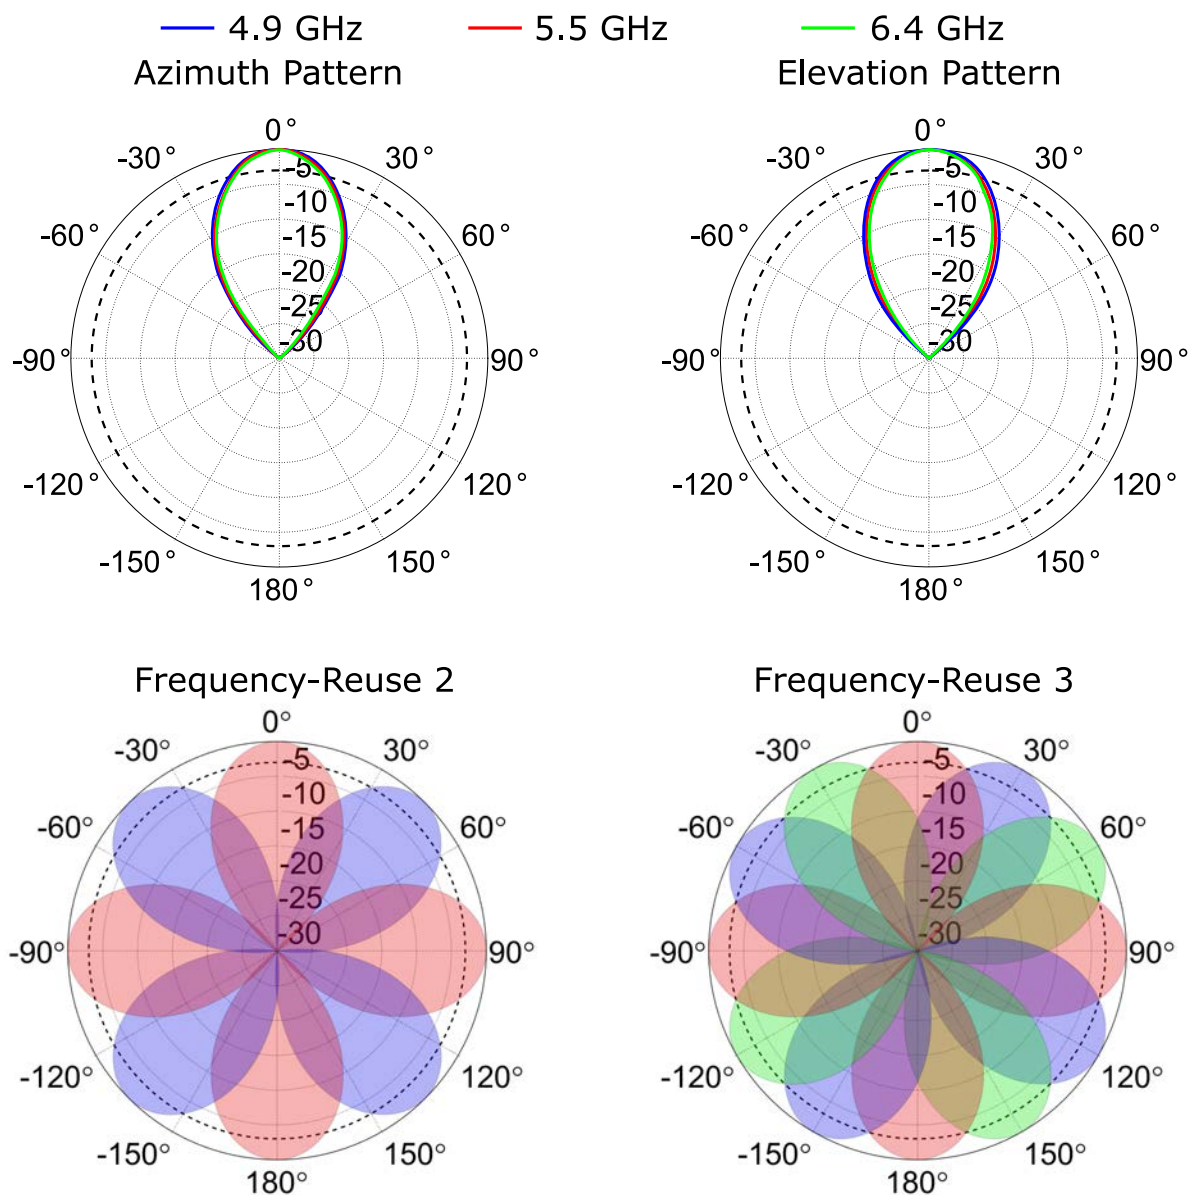

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter KP-5HA-45-RACL](#)

4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter

KP-5HA-45-RACL



Appendix

Electrical Downtilt: Angle in the antenna's elevation pattern in which the maximum gain occurs.

Gain: Antenna's average gain.

Front to Back Ratio @ 180°±30°: Average difference between the antenna's maximum gain and the maximum gain in the antenna's back lobe over ±30° angles.

Cross-polarization Ratio (dB): Typical difference between the co-polarization and cross-polarization gain across the sector's 3 dB Beam Width.

Dedicated to serving the needs of the Wireless Internet Service Provider (WISP) market, KP Performance Antennas offers purpose built products that reliably perform in the field. KP Performance Antennas product line consists of Yagi, Grid, Omni, Dish and other style antennas that operate in the 900 MHz, 2.4 GHz, 3 GHz, and 5 GHz frequencies.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4.9 GHz to 6.4GHz, 45 Degree Horn, Ubiquiti Rocket 5AC Lite Adapter KP-5HA-45-RACL](https://www.kppperformance.com/4.9-ghz-to-6.4ghz-45-degree-horn-ubiquiti-rocket-5ac-lite-adapter-kp-5ha-45-racl-p.aspx)

URL: <https://www.kppperformance.com/4.9-ghz-to-6.4ghz-45-degree-horn-ubiquiti-rocket-5ac-lite-adapter-kp-5ha-45-racl-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. KP Performance reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. KP Performance does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and KP Performance does not assume liability arising out of the use of any part or document.

KP-5HA-45-RACL CAD Drawing

