



TSBAT24-200L-WT

DATA SHEET

24V 200Ah Wide Temp LFP Battery

Features

- **Wide Temp Charging: -30C to +60C**
- **Wide Temp Discharge: -40C to +70C**
- **Longer Cycle Life: Up to 20X over Lead Acid**
- **Less Weight: ~40% less than Lead Acid**
- **Higher Power: 2x more Watt Hours than Lead Acid**
- **Stable and Safe Lithium Iron Phosphate (LiFePO4)**
- **On Board Intelligent Battery Management (BMS)**
- **Size is same as comparable Lead Acid Battery**
- **Drop in Replacement for Lead Acid Battery**
- **Integrated Carrying Handles**
- **Includes Bluetooth Communications**



*TSBAT24-200L-WT
Wide Temp Lithium Battery*

Applications

- **Remote Power Systems**
- **Backup Power Systems**
- **Off-Grid Systems**
- **Wheel Chairs, Golf Carts, Scooters**
- **Lighting**
- **RV and Boat**

Description

The TSBAT24-200L-WT LFP (LiFePO4) battery is a wide temperature, high reliability drop-in replacement for comparable Lead Acid batteries. It provides >4000 discharge cycles @ 80% discharge, about 20x what a Sealed Lead Acid battery typically provides. It also provides almost 2x usable energy storage over lead acid batteries with the same Ah rating.

Typically LiFePO4 batteries should not be charged below 0C and require DC heaters to be able to charge at low temperatures but with our wide temp Aluminum anode, the battery is able to charge down to -30C without adversely affecting cycle life.

The integrated battery management system (BMS) handles all charging and discharging regulation so that the battery can be charged using the same solar or grid connect chargers used for Lead Acid batteries. Along with its standard mechanical size, the integrated BMS allows the battery to be a true drop-in replacement for a similar sized Lead Acid battery.

The LiFePO4 chemistry is very stable and minimizes the risk of explosion or combustion due to impact, overcharging or short circuit. The 40% less weight and the integrated carrying handles make the battery easier to transport and install at remote sites.

Up to 4 batteries can be connected in series or parallel to achieve a higher battery bank voltage (series) or more energy storage (parallel). There are two 6mm screw terminals for connecting battery cables. M6 bolts are included.

For long term storage it is recommended to charge to 60% charge every 6 months.

Specifications

Nominal Voltage	25.6V
Nominal Capacity	200Ah 5120Wh
Internal Resistance	<20mΩ
Cycle Life	>4000 Cycles @ 80% DOD
Self Discharge	<3% per month
Charge Voltage	29.2 +/-0.2V
Charge Current (Max)	40A -30C to +5C 100A +5C to +60C
BMS Charge Cutoff Voltage	29.2 +/- 0.2V
Typical Discharge Current	100A
Peak Discharge Current	120A for < 3 seconds
BMS Discharge Cutoff Voltage	17.6V
Charge Temperature	-30C to +60C (-22 to 140F)
Discharge Temperature	-40C to +70C (-40 to 158F)
Suggested Storage Temperature	0C to +25C (32 to 77F)
Weatherproofing	IP65
Case	Metal
Terminal	M6 Bolts (Included)
Dimensions (LxWxH)	19.5 x 9.4 x 8.6" (495 x 240 x 218mm)
Weight	99lb (45kg)
Parallel or Serial Connections	4 batteries maximum serial or parallel
Shipping Class	Class 9 – Hazardous Materials
Certifications	UN38.3
Warranty	3 Years


LiFePO4 Voltage versus Capacity		
VOLTAGE (12V)	VOLTAGE (24V)	CAPACITY
14.6V	29.2V	100% (charging)
13.6V	27.2V	100% (resting)
13.4V	26.8V	99%
13.32V	26.64V	90%
13.2V	26.4V	70%
13.12V	26.24V	40%
13V	26V	30%
12.92V	25.84V	20%
12.8V	25.6V	17%
12.52V	25.04V	14%
12V	24V	9%
10V	20V	0%

Get the Battery Bluetooth App

- Visit the Android or IOS App Store
- Search for "Smart BMS"



SMART BMS
DalyBMS

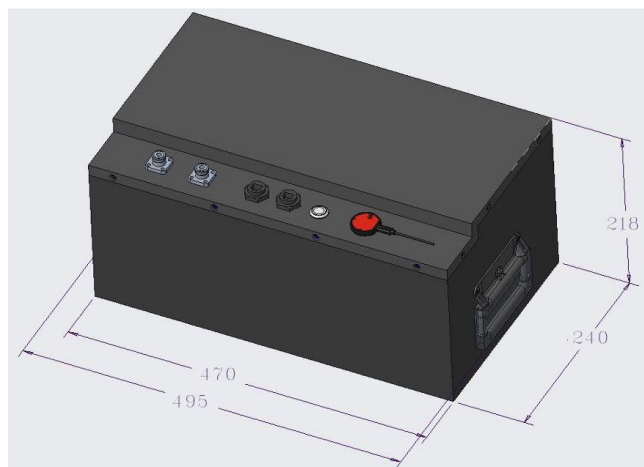

System Ordering:

TSBAT24-200L-WT 24V 200Ah Wide Temperature LiFePO4 Lithium High Cycle Long Life Battery

For further information contact:

Tyconsystems.com



930 W 14600 S Suite 600
Bluffdale, UT 84065
PH: 801-432-0003
FAX: 801-618-4220