

DATASHEET AW3014

Common Name- 2 Port B42, 43 & 48 - 65°

3300-3800MHz 2 Fixed 18.0 65°
Frequency Ports Tilt Gain Beamwidth

PRODUCT INFORMATION

This slimline solution was developed for fixed wireless applications

APPLICATION

Alpha Wireless panel antennas provide wireless network operators the highest performance and quality. Panel antennas are generally used in sectorized applications. These antennas are designed for optimal radiation patterns improving overall network performance. Various tilt options are available to address network optimization requirements.

STANDARD & CERTIFICATIONS

Certification BS EN ISO 9001:2015







FEATURES

- Wide-band antenna for 3GPP bands 42, 43 & 48.
- Dual Cross polarization antenna +/- 45°
- Mounting bracket with variable tilt (included)
- Manufactured in Ireland

The parameters in this specification follow the definitions and recommendations per NGMN P-Basta, Release 9.6.







TECHNICAL SPECIFICATION

Electrical Specifications			
Frequency Range	MHz	3300-3800MHz	
Polarisation	Degree	+/-45° Slant Linear	
Gain	dBi	18.0	
Azimuth Beamwidth	Degree	65°	
Azimuth Beam Squint	Degree<	3°	
Elevation Beamwidth	Degree	7°	
Electrical Downtilt	Degree	T0°	
Electrical Downtilt Deviation	Degree<	1°	
Impedance	Ohms	50	
VSWR	<	1.5	
Return Loss	dB>	14	
Isolation	dB>	28	
Front to Back Ratio: Total Power +/-30°	dB>	30	
Upper Sidelobe Suppression, Peak to 20°	dB>	18	
Cross-Polar Discrimination	dB>	16	
Maximum Effective Power Per Port	W	100	

Radiation Pattern Files

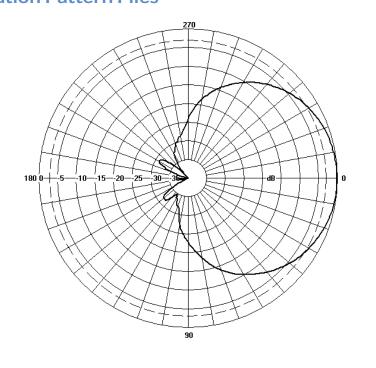

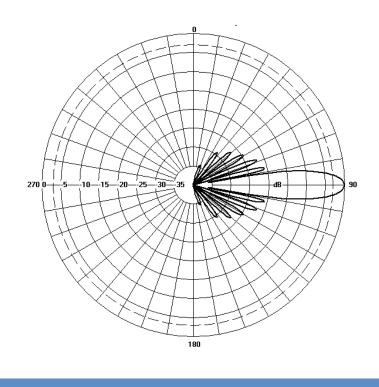

Azimuth Elevation

For radiation pattern files, please login at www.alphawireless.com





TECHNICAL SPECIFICATION


Mechanical Specifications		
Dimensions	mm (in)	750 (29.5) x 160 (6.2) x 81 (3.1) - (L x W x H)
Packing Size (LxWxD)	mm (in)	823(32.4) x 240(9.4) x 178(7)
Net Weight (antenna)	kg (lb)	4.3 (9.4)
Net Weight (mount)	kg (lb)	1.4 (3.1)
Shipping Weight	kg (lb)	5.7 (12.5)
Connector Type (Female)	-	4.3-10
Connector Quantity	-	2
Connector Position	-	Bottom
Windload Frontal (at Rated Wind Speed: 150km/h)	N (lbf)	130 (30)
Windload Lateral (at Rated Wind Speed: 150km/h)	N (Ibf)	80 (18)
Survival Wind Speed	km/h (mph)	200 (125)
Radome Material	-	UV-Stabilised PVC
Radome Colour	RAL	7035
Product Compliance Environmental	-	RoHS
Lightning Protection	-	DC Grounded
Cold Temperature Survival	°C (°F)	-40 (-40)
Hot Temperature Survival	°C (°F)	70 (158)







Mechanical Illustration

All measurements are in mm (in)

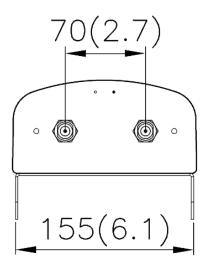

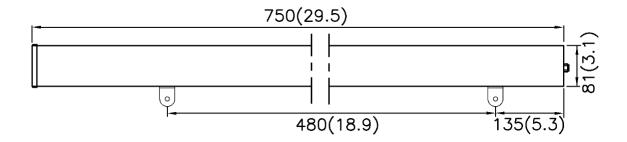

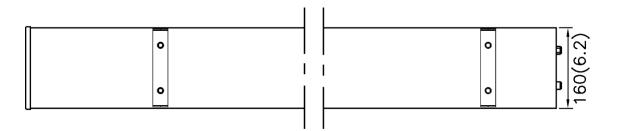







TECHNICAL SPECIFICATION

Mounting Bracket Kit

CL-V-102 Mount Kit M8 2.0mm (Mount Kit included with antenna)

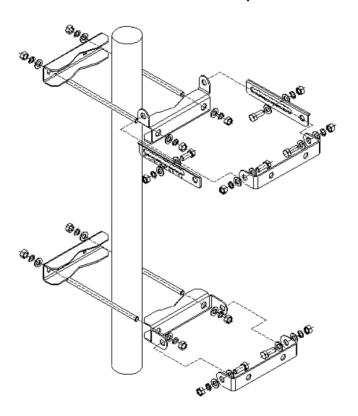

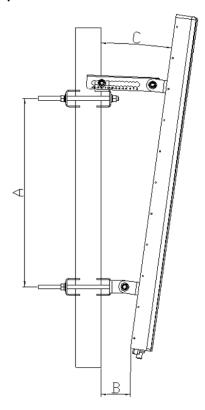

Mounting Kit Tilt Range	Mounting Kit Material	Mounting Kit Pole Diameter
0° to 10°	Stainless Steel	50mm-115mm (2" to 4.5")

Ordering Info

Order Code - Antenna	Description
AW3014-T0-F	Zero Degrees Fixed Tilt with 4.3-10 Connectors
Order Code - Accessories	Description
AW1012-2-FM-FM	RF Jumper Cable, connector types 4.3-10 (m) / 4.3-10 (m), length 2 metres (6'6")
AW1012-2-FM-NM	RF Jumper Cable, connector types 4.3-10 (m) / N-Type (m), length 2 metres (6'6")
AW1012-2-FM-TM	RF Jumper Cable, connector types 4.3-10 (m) / Nex10 (m), length 2 metres (6'6")

Enquiries

Ireland
Ashgrove Business Centre,
Ballybrittas, Portlaoise, Ireland
Post code: R32 DT0A
sales@alphawireless.com
+353 57 86 33847


USA

11322 W 79th St, Lenexa, KS 66214, USA sales@alphawireless.com

+1 913 279 0008

Alpha Wireless





party. © Alpha Wireless Limited 2014